

Hydromist Compact

User Guide



Important safety advice


Read instruction manual supplied with machine before use.

Setting machine up for use

- Secure handle into working position.
- Withdraw vacuum hose from recovery tank and lift off tank.
- Fill solution tank with hand hot water and appropriate cleaning solution.
- Replace recovery tank and reconnect vacuum hose.

Controls

1. Vacuum motor switch – extracts dirty water from carpet into recovery tank.
2. Brush drive switch – Operates the rotating brush.
3. Accessory spray switch – Pumps cleaning solution to accessories. Must be switched on when using wand or upholstery tool.
4. Spray operating lever – Sprays cleaning solution onto carpet
5. Cut-out reset button – Cut-out operates when brush motor is overloaded. Press to reset after motor has been allowed (Fig 2)

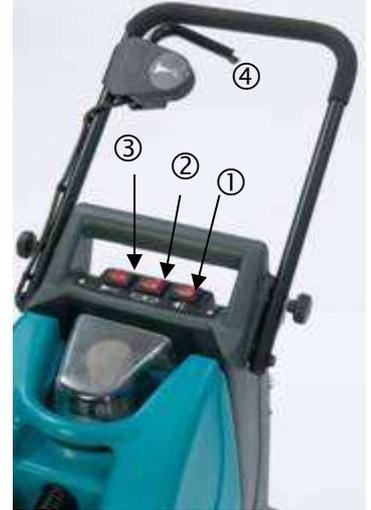

Starting the machine

- Connect the cable to mains power.
- Switch on the vacuum motor and brush drive.

Using the machine

- Operate spray lever on handle to dispense the cleaning solution, whilst pulling the machine slowly backwards to clean the carpet. Stop spraying cleaning solution about 30cm (12") before end of cleaning pass to ensure all solution is vacuumed up.
- Wheel the machine forward and repeat, slightly overlapping the previous pass.
- Do not clean any area more than twice, or overwetting could result in carpets shrinking.
- After a few passes check recovery tank for presence of foam.
- When solution spray ceases the solution tank is empty. Switch off the machine, empty the recovery tank and refill the solution tank.

If foam is present, either add defoamer or if using an all in one product, empty the recovery tank, rinse out and continue, checking regularly for foam build up.

DO NOT – use the recovery tank to fill the solution tank as dirt or sediments could damage the pump or block the spray jet.

WARNING – Should water emit from the machine switch off immediately and empty the recovery tank.

IMPORTANT – Ensure recovery tank is emptied whenever solution tank is filled.

IMPORTANT – Do not run the pump motor when the solution tank is empty, as this will damage the motor.

Hydromist Compact

User Guide



Using accessory tools

Accessory tools may be used for cleaning stairs, upholstery and inaccessible areas.

- To use accessories remove the vacuum hose from the recovery tank, and insert accessory vacuum hose in its place.
- Disconnect solution hose from connector on front of machine, and connect accessory solution hose to machine.
- Switch OFF brush drive.
- Switch ON vacuum motor and accessory spray. The accessory can now be used.

When cleaning is finished

- Run vacuum motor for approximately 2 minutes to allow residual water to be fully sucked into recovery tank.
- Disconnect vacuum hose and lift off tank. Remove cover and pull off filter. Empty the dirty water, rinse tank out with clean water.
- Disconnect solution hose from solution tank. Remove drain hose from back of machine and fit to connector. Empty tank into a bucket or drain.
- Add approximately ½ litre (1 pint) of clean water to the solution tank to flush out the tank and pump. Switch off machine and unplug.
- Clean underside of machine with a damp cloth to ensure that any carpet debris is removed, especially in the area surrounding the brush and bearing assemblies.



All users must be trained in the correct use of this machine and have read and understood the full instruction manual supplied with the machine. Details and specifications subject to change without prior notice.

HC250 user guide 03-11