

The PROtec Podium brings you all the advantages of a fibreglass access solution, non-conductive up to 100 kilovolts per foot, in the shape of a compact tower.


Its visible colour makes it stand out in a busy work environment, whilst a captive ladder, locking gate and in-line castors give it integral benefits. Working at height is made even safer with the PROtec Podium's non-slip platform deck and treads, and anti-slip feet. It is also chemical, weather and spark resistant.

Product Specification


Platform Height	1250mm
Working Height	3250mm
Overall Height	2300mm
Working Platform	607mm x 625mm
Deployed Footprint	1600mm x 1150mm
Stowed Dimensions	2250mm x 745mm x 485mm
Safe Working Load	150 kgs
Weight	50 kgs

A LOW-LEVEL FIBREGLASS PLATFORM


1

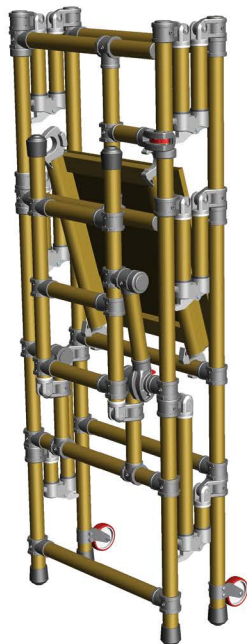

2

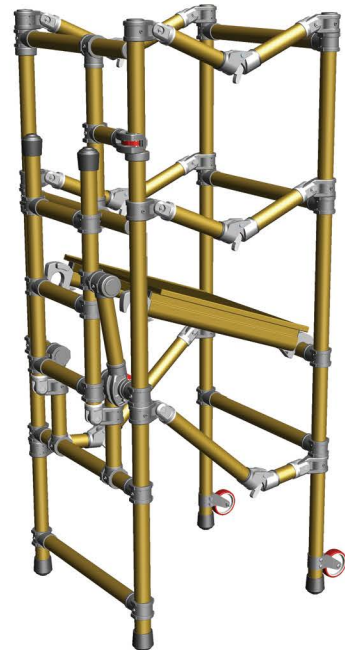

3

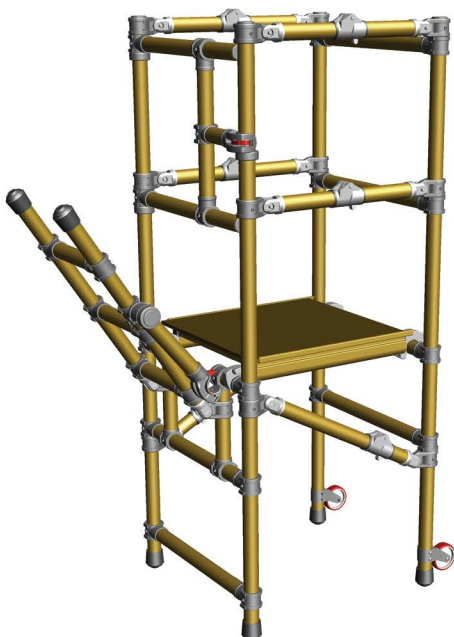

4

