


ABBI DIMENSIONS

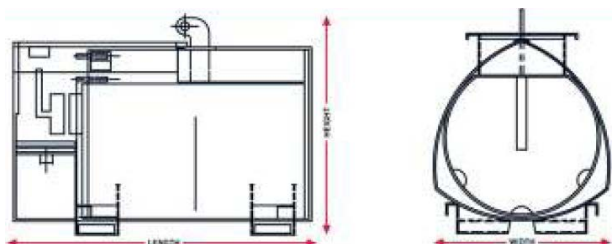

ABBI SPECIFICATIONS

MODEL K210A	CAPACITY		DIMENSIONS (mm)			WEIGHT (kg)		CERTIFICATE NUMBER	WHEELS & TYRES
	LITRES	GALLONS	LENGTH	WIDTH	HEIGHT	UNLADEN	LADEN		
	950	210	3500	1550	1700	525 *	1500	4379/Q/1495	185 R14

SK - On skids. S - On site low chassis. H - On highway low chassis.

* Unladen weight includes trailer and IBC.

ABBI OPTIONAL PUMPS AND FITTINGS

	EB12VFP: 12V 70 Litres self-priming pump c/w filter, 4m delivery hose and auto shut-off nozzle (16m ²)
	EM12VFP: 12V 50 Litres self-priming pump c/w filter, 4m delivery hose and auto shut-off nozzle.
	EB12VFP: 12V 40 Litres self-priming pump c/w filter, 4m delivery hose and auto shut-off nozzle.
	EB24VFP: 24V 40 Litres self-priming pump c/w filter, 4m delivery hose and auto shut-off nozzle.
	EB24VFPFM: 24V 40 Litres self-priming pump c/w filter, 100 flow meter, 4m delivery hose and auto shut-off nozzle.
	EB110VFPFM: 110V 40 Litres self-priming pump c/w filter, 100 flow meter, 4m delivery hose and auto shut-off nozzle.
	EB12VFPFM: 12V 40 Litres self-priming pump c/w filter, 100 flow meter, 4m delivery hose and auto shut-off nozzle.
	EM12VFPFM: 12V 50 Litres self-priming pump c/w filter, 100 flow meter, 4m delivery hose and auto shut-off nozzle. <small>Please specify on order instructions on 140 and 141</small>
	ED12V34VFPFM: 12/24V dual voltage 3060 L/min self-priming pump c/w filter, 100 flow meter, 4m delivery hose and auto shut-off nozzle. (Only available as 140 model)
	ED12V34VFP: As above without 100 flow meter. <small>See table on 140 and 141</small>
	K2MHFP: 1" semi rotary hand pump.
	DFM: 1" digital flow meter fitted in-line.

	WPFFC: Water and particulate removal 30 micron nominal filter.
	ABBI CAB: Plastic equipment cabinet, red.
	SW165R13: Spare wheel and tyre 165R13.
	SW185R14: Spare wheel and tyre 185R14.
	SWBRKT: Spare wheel and tyre bracket.
	DRPAN1: Drip pan size 1.
	SPKMD1: Spill response kit holdall - absorbs 12 litres.
	SPKH02: Spill response kit holdall - absorbs 20 litres.
	SPKH03: Spill response kit holdall - absorbs 30 litres.



FOR RAPID, LEGAL, FUEL TRANSPORTATION AND DEPLOYMENT



YOUR BUNDED, ADR APPROVED DIESEL FUEL BOWSER

AVAILABLE IN 500 - 2000 LITRES CAPACITY

