





Compact, high performance pressure washer with unique stand-up or lay-flat operating position and large carry handle.



## 1 Mobility

- The integrated carrying handle on the front of the machine enable easy loading and convenient transport.
- Push handle can be retracted at the push of a button.

## 2 Flexibility

- Vertical and horizontal operation possible.
- The wheels are not on in horizontal operation. In this way, the machine offers maximum stability.

## 3 Accessory storage

- Screw connections (M 18 × 1.5) for storing surface cleaner directly on the machine.
- Practical nozzle compartments for triple nozzle and rotary nozzle.

## 4 Quality

- The automatic pressure relief protects the components and extends the service life.
- High-quality brass cylinder head.



## HD 6/13 C Plus

- Easy Press hand spray gun and rotating stainless steel spray lance

### Technical data


<b>Order No.</b>	1.520-162.0	
<b>EAN code</b>	4039784945449	
<b>Current type</b>	<b>Ph / V / Hz</b>	1 / 230 / 50
<b>Flow rate</b>	<b>l/h</b>	590
<b>Operating pressure</b>	<b>bar / MPa</b>	130 / 13
<b>Max. pressure</b>	<b>bar / MPa</b>	190 / 19
<b>Max. water feed temperature</b>	<b>°C</b>	60
<b>Power rating</b>	<b>kW</b>	2,9
<b>Weight</b>	<b>kg</b>	25,2
<b>Dimensions (L x W x H)</b>	<b>mm</b>	380 × 360 × 930

### Equipment

<b>Trigger gun</b>	Easy-press trigger gun	
<b>Trigger gun with soft grip</b>	■	
<b>High-pressure hose</b>	<b>m</b>	10 / ID 6, 250 bar
<b>Spray lance</b>	<b>mm</b>	850
<b>Triple nozzle (0°/25°/40°)</b>	Manual	
<b>Dirt Blaster</b>	■	
<b>Anti-twist system (AVS)</b>	■	
<b>Pressure switch control</b>	■	
<b>Servo Control</b>	-	

■ Included in delivery.

# Accessories for HD 6/13 C Plus 1.520-162.0

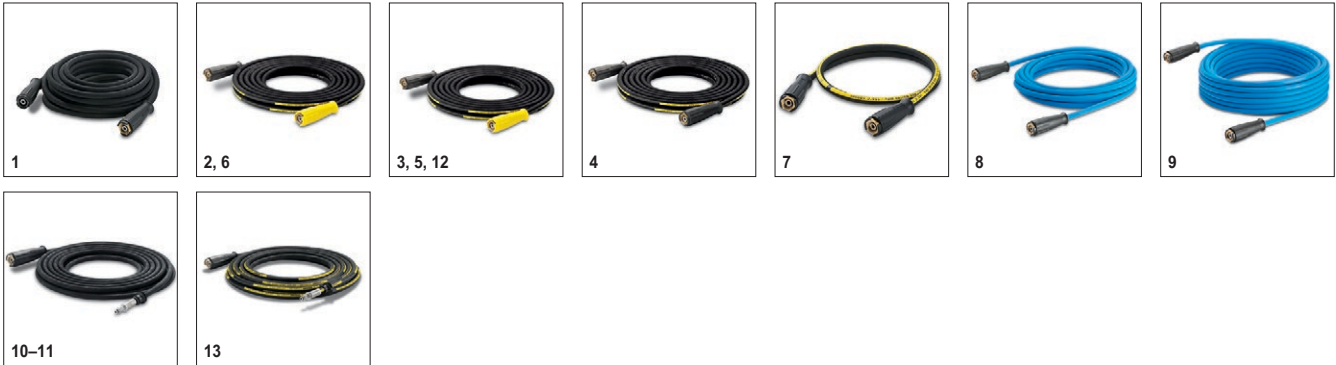

		Order No.	ID	Max. working pressure	Length	Price	Description	
<b>Standard with unions on both sides</b>								
High-pressure hose packaged	1	6.391-342.0	ID 8 mm	315 bar	10 m			▲
High-pressure hose, 30 m DN 8, including rotary coupling	2	6.390-293.0	ID 8 mm	315 bar	30 m		With rotary coupling, 2 x M 22 x 1.5	▲
<b>Longlife 400 with unions on both sides</b>								
High pressure hose DN 6, 10 m, drehbar,l	3	6.391-883.0	ID 6 mm	400 bar	10 m		With rotary coupling, 2 x M 22 x 1,5	▲
High-pressure hose packaged	4	6.391-354.0	ID 8 mm	400 bar	10 m			▲
High-pressure hose Longlife 400, 15 m, DN 8, including rotary coupling	5	6.389-709.0	ID 8 mm	400 bar	15 m		With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, 30 m DN 8, including rotary coupling	6	6.390-294.0	ID 8 mm	400 bar	30 m			▲
High-pressure hose 1.5 m, DN 8, including connectors	7	6.390-178.0	ID 8 mm	400 bar	1,5 m		1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).	□
<b>Longlife food industry version with unions on both sides</b>								
High pressure hose food DN 8 / 10 m	8	6.391-864.0	ID 8 mm	400 bar	10 m		Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With rotary coupling, 2 x M 22 x 1,5	▲
High-pressure hose food industry 400 bar, 20 m, DN 8, including rotary coupling	9	6.391-887.0	ID 8 mm	400 bar	20 m			▲
<b>Standard</b>								
High-pressure hose, 10 m DN 6, AVS trigger gun connector	10	6.391-238.0	ID 6 mm	250 bar	10 m		10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 6/155°C/250 bar.	■
High-pressure hose, 10 m, DN 6, 300 bar, AVS trigger gun connection	11	6.391-875.0	ID 6 mm	300 bar	10 m		With patented AVS connection in the trigger gun (pivot-mounted) and hand screw union. M 22 x 1.5 with anti-kink protection. NW 6/155°C/300 bar	□
<b>Longlife 400</b>								
High pressure hose DN 6, 10 m, Longlife	12	6.391-882.0	ID 6 mm	400 bar	10 m		With patented AVS connection in the trigger gun (pivot-mounted).	□
High-pressure hose packaged	13	6.391-351.0	ID 8 mm	400 bar	10 m			□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# Accessories for HD 6/13 C Plus 1.520-162.0



		Order No.	Flow rate				Price	Description	
<b>Easy Press high-pressure gun with holding power reduction (Kärcher patent)</b>									
Easy press high-pressure trigger gun with softgrip	1	4.775-463.0						Easy press high-pressure trigger gun with softgrip. For high-pressure hoses DN 6 and DN 8 with 11 mm swivel diameter.	■
<b>Trigger guns</b>									
High end high-pressure trigger gun	2	4.775-823.0							□
<b>Quick connect</b>									
Quick coupling	3	6.401-458.0						For quick change of different spray lances and accessories. Optimum adaption to Kärcher accessories, especially for connection between trigger gun and spray lance. With M22 x 1,5 female.	□
Plug nipple	4	6.401-459.0						Hardened stainless steel nipple for quick coupling 6.401-458. With M22 x 1,5 male.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# Accessories for HD 6/13 C Plus 1.520-162.0



		Order No.	Max. working pressure	Nozzle size		Price	Description	
<b>Triple nozzles</b>								
Triple nozzle 038	1	4.767-149.0	300 bar	38			Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For high-pressure cleaners with injector; low-pressure fan jet for detergent removal and application. Connector M 18x1.5.	■
<b>Dirt Blaster, small</b>								
Dirt blaster	2	4.767-023.0	180 bar	40			The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 180 bar, 18 MPa, 60°C.	■

■ Included in delivery. □ Available accessories. ▲ Extension hose.


# Accessories for HD 6/13 C Plus 1.520-162.0



		Order No.	Max. working pressure	Length		Price	Description	
<b>Rotating spray lances</b>								
Lance 850 mm, rotatable, ergonomic	1	4.760-663.0	300 bar	850 mm			850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	■
<b>Angular spray lance</b>								
WC and gutter lance	2	4.760-073.0					Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	□
<b>Spray lance</b>								
Lance 250 mm, non-rotatable	3	4.760-667.0		250 mm			250 mm stainless steel lance. With manual coupling. Non-rotatable.	□
<b>Double lance</b>								
Double lance 960 mm	4	6.394-665.0	310 bar	960 mm			960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	□
<b>Gutter cleaner</b>								
Gutter cleaning lance	5	2.642-305.0					The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# Accessories for HD 6/13 C Plus 1.520-162.0

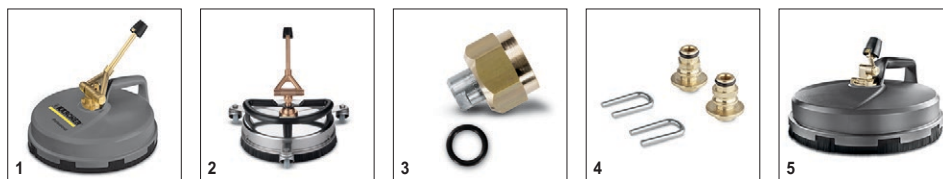

		Order No.	Flow rate	Nozzle size	Diameter	Price	Description	
<b>Hard surface cleaner FR 30</b>								
FR 30	1	2.642-997.0			300 mm			<input type="checkbox"/>
<b>Hard surface cleaner FR 30 ME</b>								
FR 30 ME surface cleaner	2	2.640-355.0			300 mm		Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	<input type="checkbox"/>
<b>Machine-specific nozzle kit for FR</b>								
Nozzle kit for surface cleaners (type-specific) 450 - 500 l/h	3	2.640-482.0	450-500 l/h				Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (450 to 500 l/h).	<input type="checkbox"/>
<b>Machine-specific nozzle kits for FR Classic</b>								
	4	2.885-312.0		40				<input type="checkbox"/>
<b>Hard surface cleaner FR Classic</b>								
	5	2.643-476.0						<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.



# Accessories for HD 6/13 C Plus 1.520-162.0



		Order No.					Price	Description	
<b>Coupling</b>									
Hose connector	1	4.403-002.0						Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: 2x M 22 x 1.5 m.	<input type="checkbox"/>
<b>HP detergent injector</b>									
	2	6.645-758.0							<input type="checkbox"/>
	3	6.500-000.0							<input type="checkbox"/>
Detergent injector for high pressure	4	3.637-170.0						Cleaning agent dosage at high pressure 3 - 5 %	<input type="checkbox"/>
<b>Machine-specific nozzle kit with order no. 3.637-170</b>									
Machine-specific nozzle kit with order no. 3.637-170.0 HD 500-700 l/h	5	4.769-045.0						For HD 500 - 700 l/h. Consists of nozzle insert + HP power nozzle + union	<input type="checkbox"/>
<b>Coupling parts</b>									
	6	6.987-705.0							<input type="checkbox"/>
<b>Adapter</b>									
Adapter M22 - Swivel	7	4.424-004.0						M22 x 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.



# Accessories for HD 6/13 C Plus 1.520-162.0




		Order No.	Nozzle size				Price	Description	
<b>Wet blasting attachment (without nozzle)</b>									
Wet blasting attachment with flow control (without nozzles)	1	4.762-010.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	<input type="checkbox"/>
Wet blasting attachment without flow control (nozzles not included)	2	4.762-022.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	<input type="checkbox"/>
<b>Nozzle pack for wet blasting attachment</b>									
Nozzle kit for wet blasting attachment 035	3	2.638-526.0	35					Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022.	<input type="checkbox"/>
<b>Boron carbide nozzle</b>									
Boron carbide nozzle, for machines as of 1000 l/h	4	6.415-084.0	6 mm					In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# Accessories for HD 6/13 C Plus 1.520-162.0



1-2



3

		Order No.	Max. working pressure	Nozzle size	Diameter	Price	Description	
<b>Pipe cleaning nozzle</b>								
Pipe cleaning nozzle	1	5.763-015.0		55	16 mm		16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>
	2	5.763-016.0		60	16 mm		16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>
	3	5.763-017.0		50	30 mm		30 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# Accessories for HD 6/13 C Plus 1.520-162.0



1

		Order No.	Flow rate				Price	Description	
<b>Foam nozzle mounting kit</b>									
Foam nozzle kit	1	2.637-926.0						Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	<input type="checkbox"/>

■ Included in delivery.    Available accessories.   ▲ Extension hose.

# Accessories for HD 6/13 C Plus 1.520-162.0



		Order No.	Length				Price	Description	
<b>Automatic, self-winding hose reels</b>									
Hose reel, automatic, 20 m, painted	1	2.639-919.0	20 m					Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Swivel holder	2	2.639-931.0						Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	<input type="checkbox"/>
Hose reel, automatic, 20 m, stainless steel	3	6.391-421.0	20 m					Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Add-on kit hose reel plastics	4	6.392-975.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	<input type="checkbox"/>
Add-on kit hose reel	5	6.392-965.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# Accessories for HD 6/13 C Plus 1.520-162.0



		Order No.	Length	Diameter	Price	Description	
<b>Starting current limiter</b>							
Starting current limiter	1	2.637-495.0				Reduces starting current in single-phase supply and protects line fuse.	<input type="checkbox"/>
<b>Geka coupling</b>							
With hose nozzle, R 1/2"	2	6.388-461.0				with hose liner	<input type="checkbox"/>
With hose nozzle, R 3/4"	3	6.388-455.0					<input type="checkbox"/>
With female thread, R 3/4"	4	6.388-473.0				with female thread	<input type="checkbox"/>
<b>Suction filter</b>							
Suction filter with check valve	5	4.730-012.0				Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	<input type="checkbox"/>
<b>Fine-mesh water filter</b>							
Fine-mesh water filter with adapter	6	4.730-102.0				Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	<input type="checkbox"/>
<b>Water supply hose</b>							
Water supply hose	7	4.440-038.0	7,5 m			NW 13 R1" / R 3/4", up to 30 °C	<input type="checkbox"/>
	8	4.440-207.0	7,5 m			NW 19 R1" / R 3/4", up to 85 °C, for pick-up	<input type="checkbox"/>
<b>Backflow check valve</b>							
Backflow preventer	9	2.641-374.0				To prevent detergent getting into the drinking water cycle in case of inlet at low-pressure. - hot water resistant up to 80 °C - tested according to IEC 60335-2-79 - integrated leakage protection	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# Accessories for HD 6/13 C Plus 1.520-162.0



		Order No.	Flow rate				Price	Description	
<b>Rotating washing brush</b>									
	1	4.762-560.0	500-800 l/h						<input type="checkbox"/>
	2	4.762-561.0	500-800 l/h						<input type="checkbox"/>
<b>Push-on washing brush</b>									
Push-on washing brush	3	4.762-497.0						With clamp for mounting directly to units' double or triple nozzle. Fits on new double and triple nozzles.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# Accessories for HD 6/13 C Plus 1.520-162.0



		Order No.	Nozzle size				Price	Description	
Power nozzle spray angle 25°									
	1	2.884-521.0	250						<input type="checkbox"/>

Included in delivery.
  Available accessories.
  Extension hose.